


Fixed bollards used for preventing access for long periods. Bolted to the ground, their purpose is to block an access point or a road. They can integrate the use of automatic or semi-automatic bollards.

DIMENSION (MM)

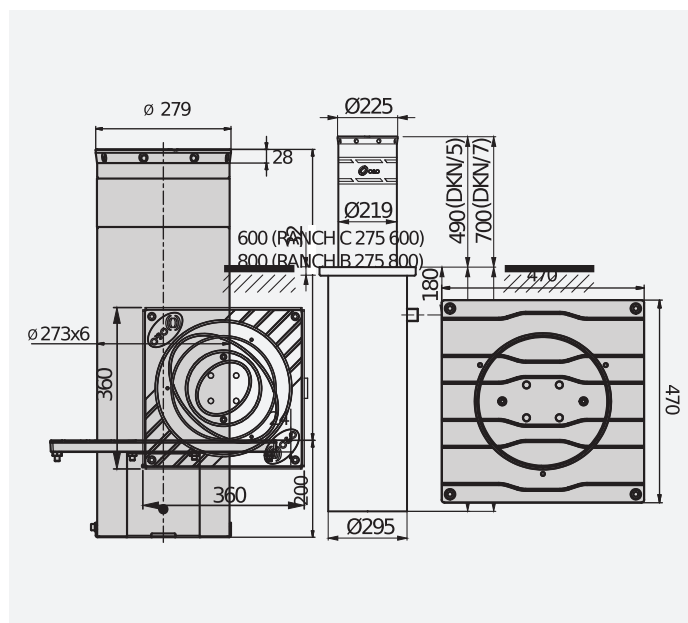

TECHNICAL FEATURES


	RANCH C 275/600CN L	RANCH C 275/600CN I	RANCH C 275/600CN LI	RANCH C 275/800CN L	RANCH C 275/800CN I	RANCH C 275/800CN LI
Operator type	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards
Rod height	600 mm	600 mm	600 mm	800 mm	800 mm	800 mm
Rod thickness	3 mm	3 mm	3 mm	3 mm	3 mm	3 mm
Rod diameter	275 mm	275 mm	275 mm	275 mm	275 mm	275 mm
Rod treatment	RAL 7015 painted steel	brushed AISI 316 stainless steel and reflective film	brushed AISI 316 stainless steel and reflective film	RAL 7015 painted steel	brushed AISI 316 stainless steel and reflective film	brushed AISI 316 stainless steel and reflective film
Rod fixing	3 bolts	3 bolts	3 bolts	3 bolts	3 bolts	3 bolts



		Description
P970102 00002	RANCH C 275/600CN L	Fixed bollard used for preventing access for long periods. Height 600 mm and diameter 275 mm. Version with lights and shaft in RAL 7015 painted steel. Flange not included. Painted steel. High breakage resistance.
P970102 00003	RANCH C 275/600CN I	Fixed bollard used for preventing access for long periods. Height 600 mm and diameter 275 mm. Version without lights and shaft in stainless steel. Flange not included. Stainless steel. High breakage resistance.
P970102 00004	RANCH C 275/600CN LI	Fixed bollard used for preventing access for long periods. Height 600 mm and diameter 275 mm. Version with lights and shaft in stainless steel. Flange not included. Stainless steel. High breakage resistance.
P970103 00002	RANCH C 275/800CN L	Fixed bollard used for preventing access for long periods. Height 800 mm and diameter 275 mm. Version with lights and shaft in RAL 7015 painted steel. Flange not included. Painted steel. High breakage resistance.
P970103 00003	RANCH C 275/800CN I	Fixed bollard used for preventing access for long periods. Height 800 mm and diameter 275 mm. Version without lights and shaft in stainless steel. Flange not included. Stainless steel. High breakage resistance.
P970103 00004	RANCH C 275/800CN LI	Fixed bollard used for preventing access for long periods. Height 800 mm and diameter 275 mm. Version with lights and shaft in stainless steel. Flange not included. Stainless steel. High breakage resistance.

RECOMMENDED ACCESSORIES

	P800104 - ALLU		P800109 - FLANGE RANCH C
	Power supply for Gas and Fixed Bollards with Lights 24 Vac (up to 80 bollards).		Flange for Ranch C.

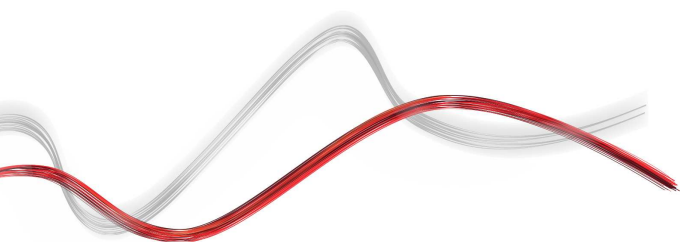

www.bft-automation.com

INFORMATIVA A TUTELA DEI DIRITTI DI PROPRIETÀ INDUSTRIALE E INTELLETTUALE DI BFT. BFT S.p.A. tutela i propri diritti di proprietà industriale attraverso il deposito di marchi, brevetti, modelli e design. La proprietà intellettuale di BFT S.p.A. è tutelata a norma della legge sul diritto d'autore. BFT S.p.A. tutela inoltre il proprio know-how adottando misure di protezione delle informazioni tecniche e commerciali inerenti la propria azienda e i propri prodotti. Tutti i prodotti presenti in questo catalogo sono MODELLI ORIGINALI BFT e BFT S.p.A. è la sola autorizzata a produrli e commercializzarli in tutto il Mondo. Tutti i nomi commerciali attribuiti ai prodotti presenti in questo catalogo sono di titolarità di BFT S.p.A. che è la sola autorizzata al loro uso in relazione alla relativa categoria merceologica. I CONTRAFFATTORI VERRANNO PERSEGUITI A NORMA DI LEGGE SIA IN SEDE CIVILE CHE PENALE. IL TUTTO A GARANZIA NON SOLO DEL PATRIMONIO INTELLETTUALE DI BFT, MA ANCHE A TUTELA DEI CLIENTI CHE ACQUISTANDO PRODOTTI BFT ACQUISTANO PRODOTTI ORIGINALI FRUTTO DI STUDI E PROGETTI INTERNI ALLA SOCIETÀ BFT.